


## ICL-B6620

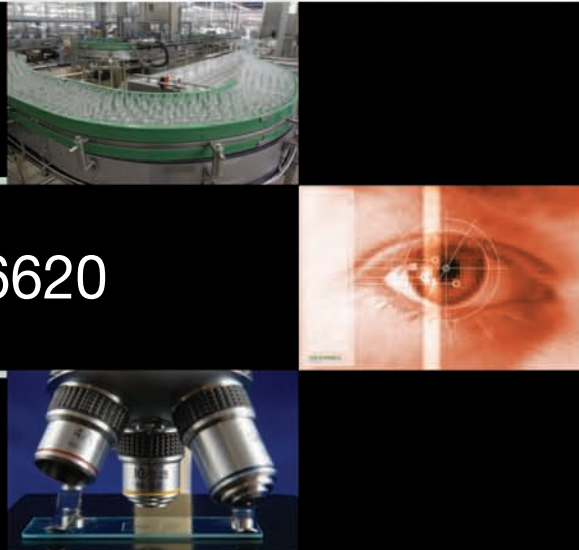

The **ICL-B6620** is an advanced high-speed progressive scan, fully programmable CCD camera designed for imaging applications that require high frame rates, high quality images, and powerful features and flexibility. The camera has a small size, light weight, and is built around Kodak's KAI-29050 TRUESENSE 5.5micron Interline transfer CCD image sensor with a 43.3 mm image diagonal. ICL-B6620 is available with CameraLink output.

The ICL-B6620 provides an image resolution of 6600 x 4400 and delivers up to 2.4 frames per second at full resolution. The camera image processing engine is based on a high-speed, high-density FPGA, featuring programmable resolution, speed, 8 independent AOIs, binning, triggering, exposure control, line and frame time, I/O mapping, external/internal sync, AGC, AEC, Auto Iris, transfer function correction, user LUT, static and Dynamic Defective and Hot Pixel Correction (DPC, HPC), Flat Field Correction (FFC) and Horizontal Image Reversal. MTBF of 660,00 hrs. @ 40°C.

### Features

- 6600/6576 x 4400/4384
- Mono and color - 8/10/12/14-bit data
- Normal and over-clock operation (1.8/2.5 fps)
- Base CameraLink
- Two dimensional Flat Field Correction
- RS232 serial communication
- Analog and digital gain and offset control
- 1x, 2x, 3x, 4x, 8x horizontal and vertical binning
- Eight (8) independent horizontal and vertical AOIs
- Programmable horizontal and vertical resolution
- Programmable line time, frame time and speed
- Programmable external trigger:
  - 3 triggering sources
  - 5 triggering modes
- Internal/External exposure control

- Automatic gain, exposure and iris control
- Automatic white balance
- Internal/External H and V sync input/output
- Left/right digital bit shift
- Test image with image superimposition
- Built in pulse generator
- Programmable I/O mapping
  - 4 programmable inputs
  - 3 programmable outputs
- Dynamic transfer function correction
- Dynamic black level correction
- Defective and hot pixel correction (static/dynamic)
- Temperature monitor
- Field upgradeable firmware
- Customer defined Look Up Table (LUT)
- Flat field correction
- Reverse image (H. mirror)

### Applications


- Industrial
- Medical
- Microscopy
- Military
- Scientific
- Surveillance

# Specifications for Bobcat ICL-B6620

Maximum Resolution	6600 x 4400
Sensor Type	43.3 mm diagonal CCD KAI-29050
Pixel Size	5.50 um
Frame Rate	1.8/2.4 fps (normal/overclock)
Max Frame Rate	13 FPS
Minimum S/N ratio	60 db
Video Output	Base Camera Link, mini CL interface
Output Format	8, 10, 12 bit dual, 8, 10, 12, 14 bit single
Binning H & V	x1, x2, x3, x4, x8
Area of Interest	8 independent AOIs, 2 x 2 to 6600 x 4400
Shutter Speed	1/125,000 to 1/2.5 sec (nom)
Long Integration	Up to 16 sec
Gamma Correction	G=1.0, G= 0.45, user upgradable LUT
Video Gain	36 dB range, 1024 steps, 0.0351 dB per step
Exposure and AGC	Manual, Auto, Programmable
Iris Control	Auto, Programmable
Hardware Trigger	LVTTL or TTL via IN1/IN2, optically isolated, level, edge, pulse-width, programmable
Software Trigger	Frame-grabber via CC1/CC2, level, edge, pulse-width, programmable
Trigger Modes	Programmable, standard, double exposure, fast, frame accumulation, asynchronous
Strobe Output	Programmable position and duration
Image Overlay	Yes, Programmable
RS232 Interface	Yes
Data Corrections	DPC, HPC, LUT, FFC
Min. Illumination	1 Lux, F/1.4
Power Input Range	12 VDC, (10 V – 15 V)
Power Consumption	3.6 W (12V)
Size (W x H x L), Weight	60 x 60 x 45mm, 320g
Lens Mount	F mount
Vibration, Shock	10G (20 - 200)Hz XYZ, 70G
Environmental	Operation (-30° to 60°) C, storage (-40° to 70°) C
Humidity	10% to 90% non-condensing
MBTF	MTBF of 660,00 hrs. @ 40°C

## Power and I/O Interface

Connector: Hirose HR 10A-10R-12PB(71)



<b>1</b>	12V DC Return	<b>7</b>	OUT1 Signal
<b>2</b>	+12V DC	<b>8</b>	IN1 Signal
<b>3</b>	IRIS VCC	<b>9</b>	IN2 Signal
<b>4</b>	IRIS Video	<b>10</b>	IN1/2 Return
<b>5</b>	IRIS Return	<b>11</b>	Reserved
<b>6</b>	OUT1/2 Return	<b>12</b>	OUT2 Signal

## Power Requirements

12V DC, (10V min, 15V max)  
300 mA steady, 1.5 A inrush (12.0 V)  
3.6 W

## Accessories

PS12V04: Power Supply (sold separately)

## Ordering Information

Order: **ICL-B6620**

### Camera Family

**B**-Bobcat Family

### Sensor Type

**M**-Monochrome

**C**-Color


### Lens Mount

**F**-“F” Mount (default)


### CCD

**K**-Kodak


## Spectral Response

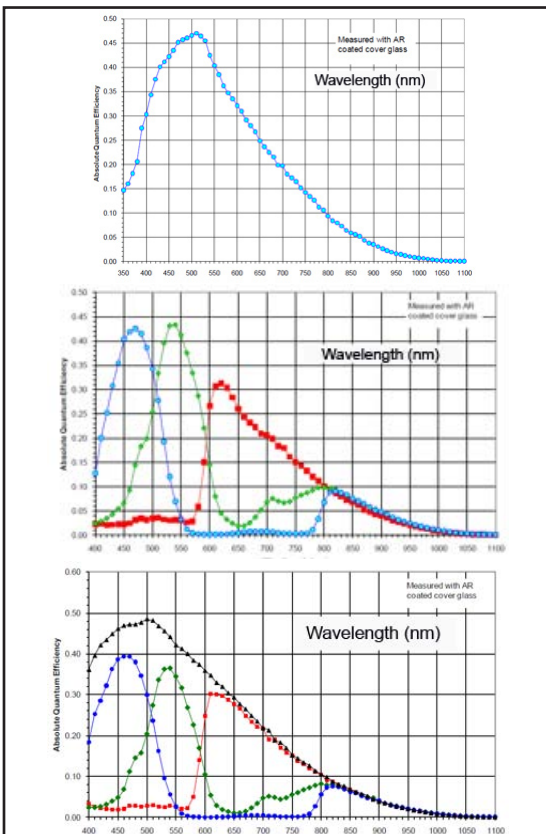

## Configuration Utility

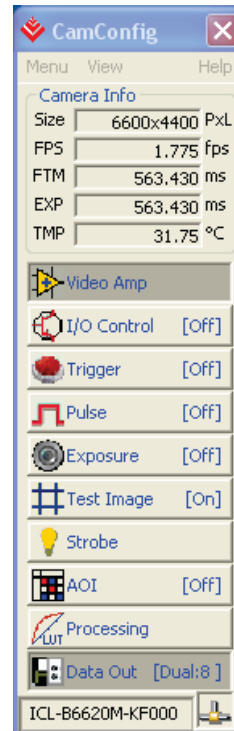

## Mechanical Dimensions

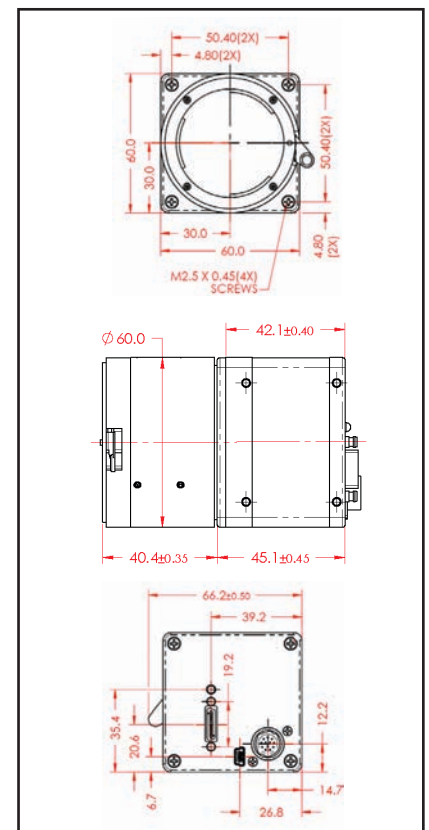

Copyright © 2009, Imperx, Inc. Product information subject to change without notice. Rev. 1.0, 06/2011

## Distribution in the UK



**Lambda Photometrics Ltd.**, Lambda House, Batford Mill, Harpenden, Hertfordshire AL5 5BZ  
E: info@lambdaphoto.co.uk W: www.lambdaphoto.co.uk T: +44 (0)1582 764334 F: +44 (0)1582 712084  
The leading supplier of scientific and industrial lasers, optical systems and associated accessories, fibre optic components and instrumentation, and machine vision products.