



DISTRIBUTED SENSING SYSTEM
(Model DSS™ 4300)



MEASUREMENT PERFORMANCE HIGHLIGHTS

- $\pm 1 \mu\text{Strain}$ resolution
- $\pm 0.1 \text{ C}$ resolution
- 1 cm spatial resolution up to 70 meters
- Measure thousands of sensors in a single fiber

APPLICATIONS

- Structural health monitoring for naval, aerospace and civil structures
- Conformal deformation and shape sensing
- Composite damage assessment
- Temperature profile characterization
- Industrial chemical process monitoring
- Condition-based maintenance

Luna Technologies' **Distributed Sensing System (DSS™) 4300** is a fiber-optic sensing tool for making distributed measurements of temperature and strain. The DSS™ uses swept-wavelength interferometry to simultaneously interrogate thousands of sensors on a single fiber. These sensors consist of discrete Fiber Bragg Grating (FBG) point sensors which can each reflect the same nominal wavelength. As such, the sensors can be fabricated on the draw tower, eliminating the need for individual grating fabrication.

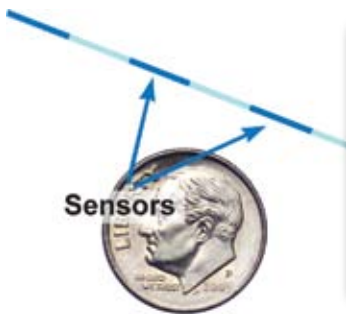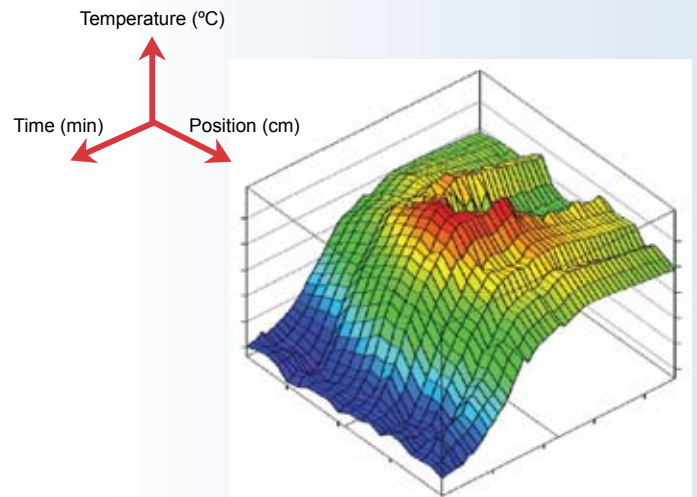

Luna's revolutionary Fiber Bragg Grating (FBG) manufacturing process allows users a first-of-its-kind benefit of measuring with cost effective sensors.

The Luna DSS™ 4300 provides highly distributed fiber sensing for temperature and strain while maintaining the strength and structural integrity of the fiber.

DISTRIBUTED SENSING SYSTEM (Model DSS™ 4300)

PARAMETER	SPECIFICATION	UNITS
Maximum Sensing Length:	70	meters
Sensor Spatial Resolution ¹ :	1.0	cm
Strain:		
Resolution ² :	± 1	µStrain
Range ³ :	± 7,000 ⁴	µStrain
Temperature:		
Resolution ⁴ :	± 0.1	C
Range ⁵ :	-50 to 300	C
Wavelength range ⁶ :	1525 - 1605	nm
Wavelength:		
Resolution	0.02	pm
Accuracy ⁷ :	± 1.5	pm
Measurement Rate ⁸ :	0.3	Hz

- 1 Typical parameter for sensing fiber fabrication
- 2 Temperature and strain accuracies are calculated from spectral shift of FBGs using $1 \text{ GHz} \approx 0.8 \text{ C} \approx 7 \text{ } \mu\text{strain}$ [see A. Othonos and K. Kalli, Fiber Bragg Gratings (Actech House, Boston, 1999)].
- 3 Based on available wavelength scan range and calibration coefficients for SMF-28 type fiber
- 4 With FBG wavelength in center of laser range
- 5 Based on material properties of polyamide-coated SMF-28 type fiber.
- 6 Range is nominal.
- 7 Accuracy maintained by an internal NIST-traceable HCN gas cell
- 8 For 1.25 nm scan range

© 2009 Luna Innovations Incorporated, Roanoke, VA.
 All rights reserved.
 DSS™ is a trademark of Luna Innovations Incorporated.
 LTDSS4300 REV.003
 Date of Revision 01/15/09



Distribution in the UK



Lambda Photometrics Ltd, Lambda House, Batford Mill, Harpenden, Hertfordshire AL5 5BZ
E: info@lambdaphoto.co.uk **W:** www.lambdaphoto.co.uk **T:** +44 (0)1582 764334 **F:** +44 (0)1582 712084
 The leading supplier of scientific and industrial lasers, optical systems and associated accessories, fibre optic components and instrumentation, and machine vision products.