

PAD industrial LED-Lighting

Strobe Control Unit, 8 Amps. Adjustable 0-10volt

The Strobe control units are designed to control all types of PXX-lights.


The unit is designed for "P&P" (plug and play). Just connect the LED-array and the controller has an electronic sensor for identification of array.

Light intensity is adjusted by an external voltage control, 0-10 volt.

Delivered with 5 meter Power cable.



Mechanical dimensions:

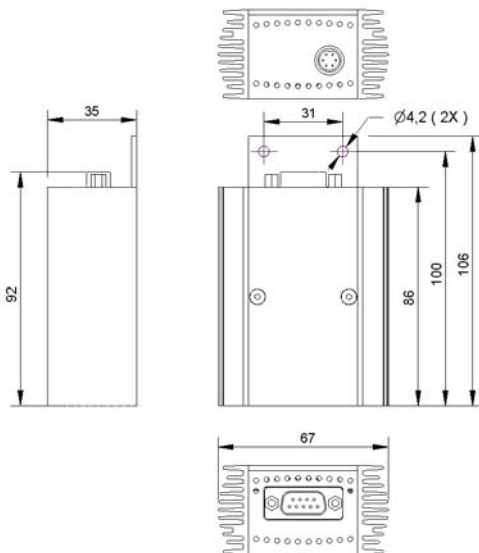

Specifications:

Supply voltage: 24V DC +-5%
Max 1.0A.
Power output: Max 8 A, 24A.
Controlled: 0-10V on pin 5, D-sub
Common on pin 3/4

Operation temp: 0 to 65 degr. Celsius

Housed in black oxidized metallic box.
CE-approved/RoHS compliant.

Order information:
PAD1 1141/8 8A

Option: DIN-Clips add /D