

PAD industrial LED-Lighting

LED Front Light 56x76 mm

A basic array, will simply suit your own application.

The active LED area is 46x66 mm (30sqcm)

Only four M3 holes for fastening of the array.


Can be used for either steady state or strobe mode.

This light is housed in black aluminium.

N.B. no bracket included.



Mechanical dimensions:

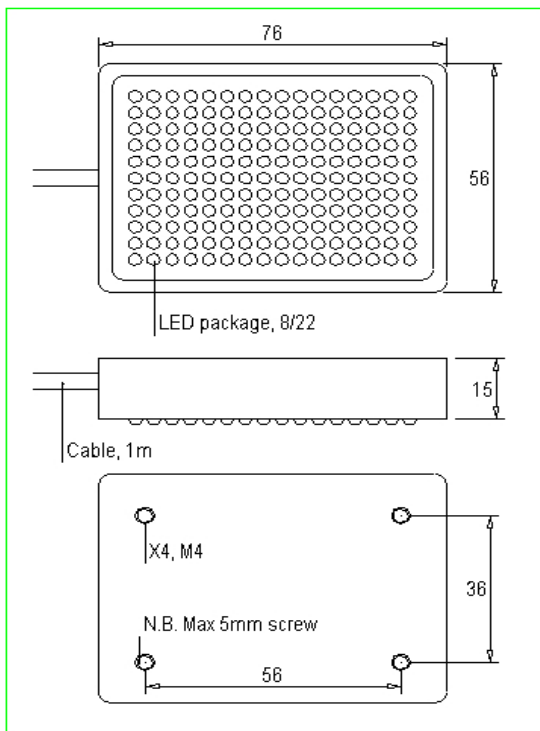

Specifications:

Can be used for either steady state or strobe mode together with our control units.

Delivered with 1 meter cable for controller connection.

CE-approved/RoHS compliant.

Order information:

Controllers St.St/Strobe

Red 630 nm	PAH5 1011	0.3A/8A
Red 640 nm	PAD5 1011	0.3A/8A
IR 880 nm	PAR5 1011	1A/8A
Green 520 nm	PAG5 1011	1A/8A
Blue 465 nm	PAB5 1011	1A/8A
White	PTW5 1011	1A/8A