


PAD industrial LED-Lighting

Back Light, profile based.

A backlight based on our profile system.
The size is from 51x84mm to 207x408 mm.
This backlight family are available in red,
640nm and amber 617nm.
Amber is 2 times as intensive as the red one.
Very easy to customize to suit your own
application.
Options: Brackets



Mechanical dimensions:

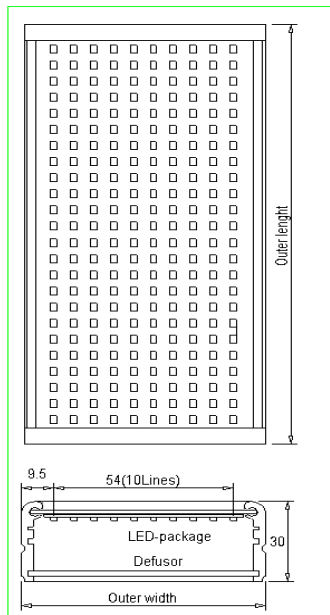

Width in lines	XX	mm, width
06	51	
08	63	
10	75	
12	87	
14	99	
16	111	
18	123	
20	135	
22	147	
24	159	
26	171	
28	183	
30	195	
32	207	

Length in modules	YY	mm, length
02	84	
03	120	
04	156	
05	192	
06	228	
07	264	
08	300	
09	336	
10	372	
11	408	
12	444	

Specifications:

Can be used for either steady state or strobe mode together with our control units.
Based on SMD-leds, red 640 nm.
Delivered with 1 meter cable for controller connection.
Illuminated area,
equal to outer area minus 12mm
CE-approved/ RoHS compliant

Order information:

XX= width in lines, see table

YY=Lenght in modules, see table.

Eg Width 123 mm (18 lines)

Lenght 228 mm (6 modules)

Order for Red-640 nm: PAD7 1806

Order for Amber-617 nm: TAD7 1806

Other width and length on request.

Brackets: see "Bracket"

Control units: Ask for information