

S-LINK-2



Dual Channel, PC-Based Power and Energy Monitor



Monitors

Energy Detectors


Power Detectors

OEM Detectors

Calorimeters

Diffractive Optics

Beam Diagnostics

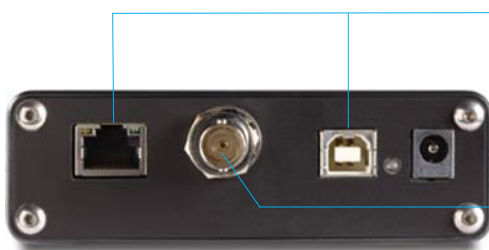

Key Features

- 1 **Reads Both Power and Energy**
Thermopiles and pyroelectrics
- 2 **PC-Based**
Connects to your PC with included software
- 3 **Serial Commands**
Serial commands are available on all versions to let you take full control
- 4 **Fastest Data Transfer Rate**
Get all the points transferred directly into your PC at 10 kHz/Channel
- 5 **USB or Ethernet**
Chose your favorite communications port. The USB version is port-powered
- 6 **External Trigger**
Every model comes standard with a 2.4 V to 24 V external trigger



Acquisition
↓
Treatment
↓
Transfer

Accessories

» **USB Cable**
Additional USB Cable.


» **Protective Pouch**
Protect your monitor from scratches and dust.

» **Pelican Carrying Case**
We offer a robust hard shell polymer carrying case.

» **Ethernet Cable**
Additional Ethernet Cable for the Ethernet version.



SPECIFICATIONS

Model	S-LINK-2
	

Detector Types	Thermopiles, Pyroelectrics
----------------	----------------------------

Display	PC-Based
---------	----------

POWER METER SPECIFICATIONS	S-LINK-2
-----------------------------------	----------

Power Range	1 μ W to 30 kW
Monitor Accuracy	± 0.75 % for 25% to full scale
Statistics	Current Value, Max, Min, Average, Std Dev., RMS & PTP Stability, Time

ENERGY METER SPECIFICATIONS	
------------------------------------	--

Energy Range	80 nJ to 30 kJ
Resolution (Digital)	Normal Mode: Current scale/4096
Monitor Accuracy	
<500 Hz (MB), <1200 Hz (MT)	1%
500 to 1 200 Hz (MB)	2%
1 200 to 6 000 Hz (MT)	3%
6 000 to 10 000 Hz (MT)	6%
Real Time Data Transfer	10 kHz/Channel in normal mode, no missing point
Statistics	Current Value, Max, Min, Average, Std Dev., RMS & PTP Stability, Pulse #, repetition Rate, Average Power

DETECTOR COMPATIBILITY	
-------------------------------	--

Thermopile	Average Power & Single Shot Energy
Pyroelectric	Pulse Energy

GENERAL SPECIFICATIONS	
-------------------------------	--

Number of Channels	2
Digital Display	Computer Screen
Data Display	Real Time, Ratio, Line Plot, Histogram, Statistics and 3D Histogram
Serial Commands and Data Transfer Via	USB (standard) or Ethernet (option) ^a
Real Time Data Transfer Rate	10 kHz/Channel in normal mode, no missing point (for pyroelectrics only) ^b
Dimensions	105W x 33H x 230D mm
Weight	0.424 kg
External Power Supply (Ethernet version only)	100/240 VAC 50-60 Hz to 9 VDC 1.66 A

ORDERING INFORMATION	
-----------------------------	--

Full Product Name	S-LINK-2	S-LINK-2 (Ethernet) ^a
Product Number	201030	201170

a. The Ethernet version also includes the USB output.

b. Actual rate may depend on the computer.

America

Canada
United States
South America

Europe

Austria
Belgium
France
Germany
Ireland
Italy
Poland
Russia
Spain
Sweden
Scandinavia
Switzerland
The Netherlands
Turkey
United Kingdom

Asia Pacific

China
India
Indonesia
Israel
Japan
Korea
Malaysia
Philippines
Singapore
Taiwan
Thailand
Vietnam

Oceania

Australia
New Zealand



gentec-EO

Leader in Laser Beam Measurement Since 1972

Headquarters

445 St-Jean-Baptiste, Suite 160
Québec, QC, G2E 5N7, CANADA

T (418) 651-8003
F (418) 651-1174
1.888.5Gentec (543.6832)

info@gentec-eo.com

Calibration Centers

Quebec City, Canada
Olching (Munich), Germany

Distributed in the UK by

Lambda
photometrics λ

Batford Mill, Harpenden, Herts., UK, AL5 5BZ

T +44 (0) 1582 764334
F +44 (0) 1582 712084

info@lambdaphoto.co.uk
www.lambdaphoto.co.uk

www.gentec-eo.com