




GEN<I>CAM

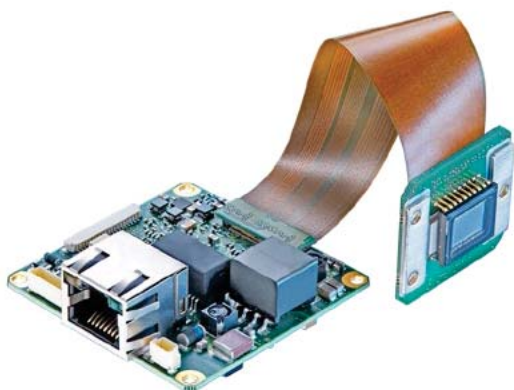

sensor information

sensor	CMOSIS CMV2000
type	2/3" progressive scan CMOS
resolution	2040 × 1084 px
pixel size	5.5 × 5.5 µm

acquisition formats

image formats, frame rate max.	Full Frame, 2040 x 1084 px, max. 55,0 fps
pixel formats	Mono 8 Mono12 Mono12 Packed

image pre-processing

analog controls	Gain (0 ... 18 dB) Offset (0 ... 255 LSB 12 Bit)
color models	Mono

interfaces and connectors

data interface	Gigabit Ethernet, Transfer rate 1000 Mb/s/sec, Fast Ethernet, Transfer Rate 100 Mb/s/sec, Connector: 8P8C Modular Jack (RJ45)
process interface	JSTBM08B-SRSS-TB 8 pins
power supply	JSTBM03B-SRSS-TB 3 pins

mechanical data

material	without housing
lens mount	C-mount / S-mount (adapter)
width	28,5 mm (sensor print) 48 mm (system print)
height	28,5 mm (sensor print) 48 mm (system print)
weight	≤ 30 g

electrical data

voltage supply range +Vs	12 ... 24 V DC (external power supply) 36 ... 57 V DC (Power over Ethernet)
power consumption	approx. 3.5 W @ 12 VDC and 55.0 fps approx. 3.8 W @ 48 VDC (PoE) and 55.0 fps


environmental conditions

operating temperature	Depends on the thermal encapsulation (T _{max} = 70 °C @ Measurement Point)
humidity	10 ... 90 % (non-condensing)

digital I/Os

lines	1 input line 3 output lines
-------	--------------------------------

dimension drawing

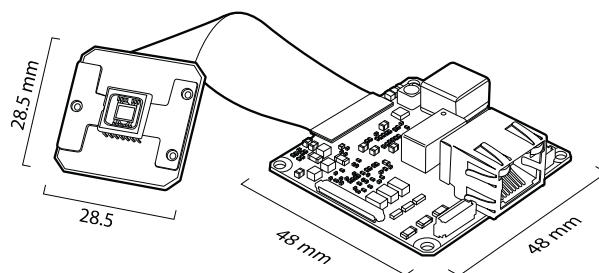

Distribution in the UK & Ireland



Lambda Photometrics Limited
Lambda House Batford Mill
Harpenden Herts AL5 5BZ
United Kingdom

E: info@lambdaphoto.co.uk
W: www.lambdaphoto.co.uk
T: +44 (0)1582 764334
F: +44 (0)1582 712084