



## DTC Diffractive Transmission Cylinder

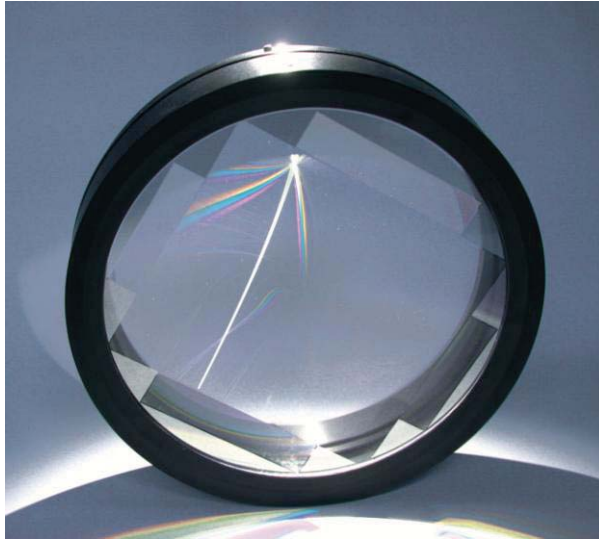

- Customer-specific layout with main and alignment areas
- Compatible with standard interferometer bayonet mount
- With integrated Fizeau reference plane
- With calibration map of the Fizeau plane

<b>Size of bayonet mount</b>	2" to 12"
<b>Maximum active area</b>	diameter < 220 mm
<b>Alignment features</b>	two cat-eye beams
<b>Lowest f-number</b>	f/0.7
<b>Measuring accuracy</b>	< PV $\lambda/20$ ( $\lambda/40$ with calibration)
<b>Radius of curvature measurement</b>	Relative precision up to $5 \cdot 10^{-5}$ with cat-eye beam

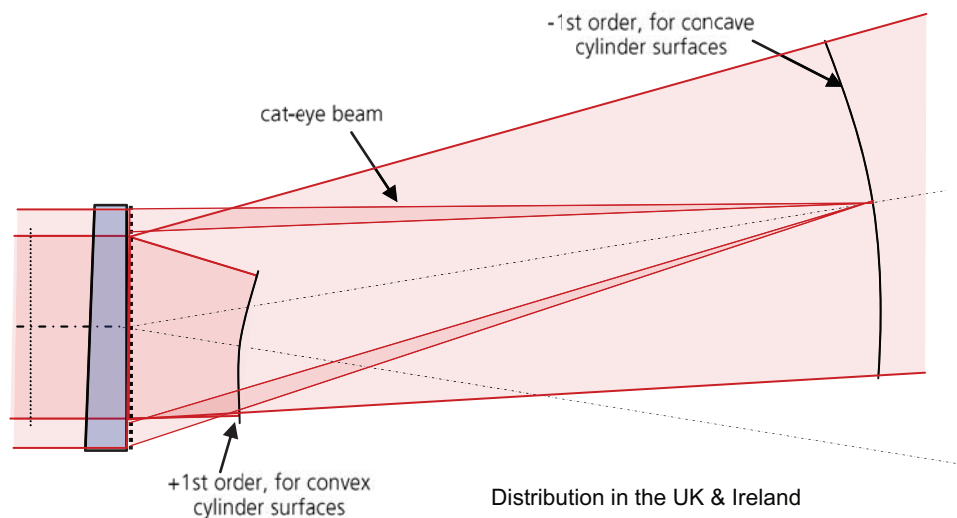

Distribution in the UK & Ireland



**Characterisation,  
Measurement &  
Analysis**

**Lambda Photometrics Limited**  
 Lambda House Batford Mill  
 Harpenden Herts AL5 5BZ  
 United Kingdom  
**E:** [info@lambdaphoto.co.uk](mailto:info@lambdaphoto.co.uk)  
**W:** [www.lambdaphoto.co.uk](http://www.lambdaphoto.co.uk)  
**T:** +44 (0)1582 764334  
**F:** +44 (0)1582 712084