



Distribution in the UK & Ireland



PRODUCT
DATASHEET


Lambda Photometrics Limited
Lambda House Batford Mill
Harpenden Herts AL5 5BZ
United Kingdom

E: info@lambdaphoto.co.uk

W: www.lambdaphoto.co.uk

T: +44 (0)1582 764334

F: +44 (0)1582 712084

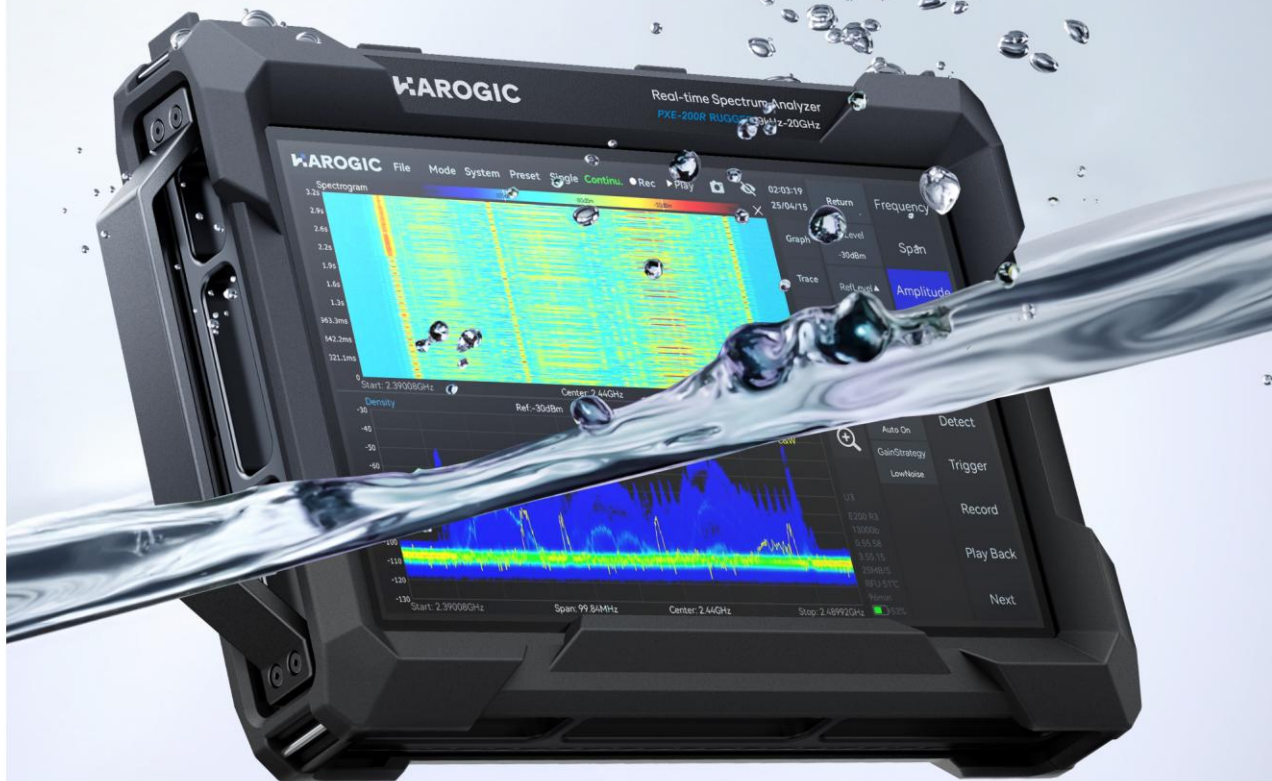

Handheld/Benchttop REAL-TIME SPECTRUM ANALYZER

PXE-90/200 R
9.5/20 GHz

V1.4 25/08/08

AROGIC



PXE-90/200 RUGGED Rugged Spectrum Analyzer OVERVIEW

Key facts

Rugged design, IEC IP68-rated waterproof and dustproof

2.5 kg portable design, 10.1-inch multi-touch screen

Frequency range: 9 kHz - 9.5/20 GHz

1 GHz DANL: -166 dBm/Hz

1 GHz phase noise: -100 dBc/Hz@10 kHz


Analysis bandwidth: up to 100 MHz

RAM: 8 GB, harddisk: 64 GB SSD


Environmental adaptability: GJB150.16A-2009 and GJB150.18A-2009 standards

Applications

Standard spectrum sweep

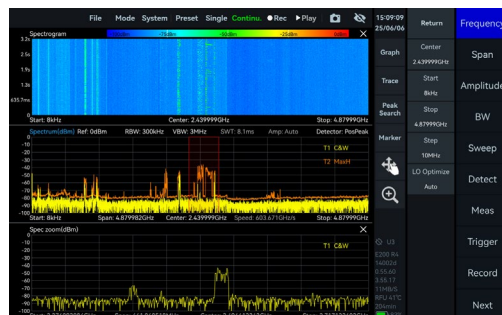


IQ streaming and analysis

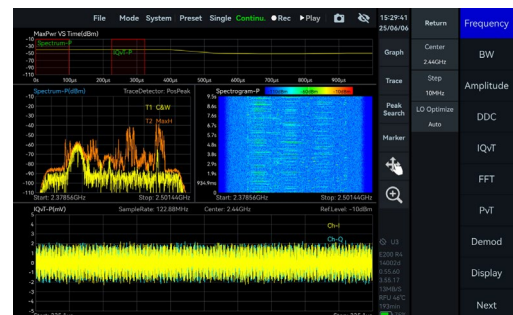

Power vs time measurement



Real-time analysis

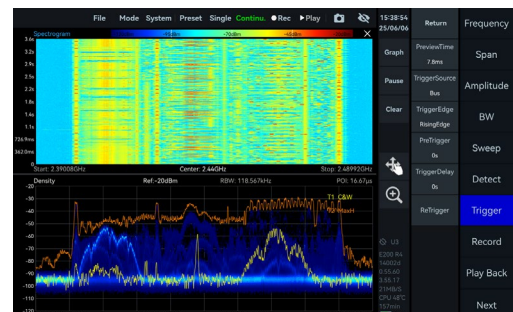

Applications


Channel power/ACPR



Phase noise




Frequency tracking

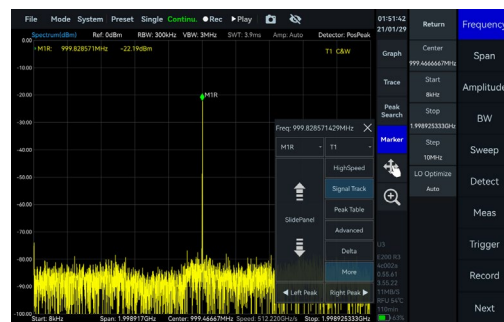


Pulse signal measure



AM/FM demodulation

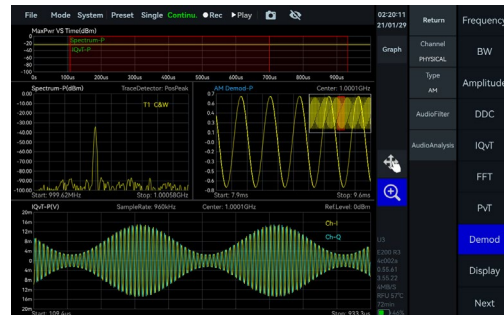

Basic digital demodulation

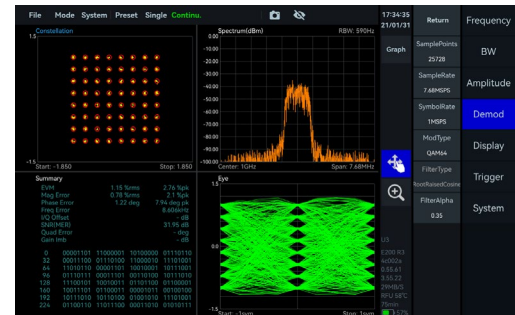

Specifications*(Preview)

FREQUENCY

Frequency range	PXE-90R		PXE-200R	
		9 kHz - 9.5 GHz		9 kHz - 20 GHz
Reference clock	Internal or external			
Frequency accuracy	TCXO (std.)		<1 ppm, manual correction is available	
	OCXO (opt01)		<1 ppm, manual correction is available	
Aging and temperature stability	TCXO (std.)		<1 ppm/year, <1 ppm	
	OCXO (opt01)		<1 ppm/year, <0.15 ppm	

SPECTRUM PURITY

SSB phase noise (dBc/Hz)	PXE-90R		PXE-200R	
	Carrier frequency	1 GHz	9.5 GHz	1 GHz
1 kHz	-95.2	-91.5	-91.2	-80.6
10 kHz	-101.6	-98.5	-99.7	-90.6
100 kHz	-100.6	-99.7	-101.1	-96.2
1 MHz	-120.9	-116.2	-121.6	-111.5
Residual response (dBm)				
Spur reject = bypass				
RBW = 1 kHz				
PosPeak detector				
Reference level (R.L.)	PXE-90R		PXE-200R	
	0 dBm	-50 dBm	0 dBm	-50 dBm
9 kHz - 1 GHz	-83	-120	-90	-120
1 GHz - 3 GHz	-83	-120	-80	-120
3 GHz - 9.5/20 GHz	-90	-130	-90	-120
Image rejection	PXE-90R		PXE-200R	
	9 kHz - 3 GHz		>90 dBc (typ.)	
3 GHz - 9.5 GHz	>90 dBc(typ.) for spur reject = enhanced; >60 dBc (typ.) for spur reject = bypass		>90 dBc (typ.)	

9.5 GHz - 20 GHz

>90 dBc(typ.) for spur reject = enhanced;
>60 dBc (typ.) for spur reject = bypass

IF rejection

>90 dBc (typ.) for spur reject = enhanced;
>80 dBc (typ.) for spur reject = bypass

Local oscillator related
spurious

<-65 dBc
Center frequency $\pm (N/M) * 100$ MHz, N, M = 1, 2, 3, 4, 5...

IIP3 / IIP2 (dBm)

Carrier frequency	PXE-90R		PXE-200R	
	1 GHz	9.5 GHz	1 GHz	20 GHz
R.L. = 20 dBm	46.1/83.2	40.5/92.8	45.5/82.6	35.3/93.6
R.L. = 0 dBm	26.7/85.0	19.2/90.3	25.5/81.1	21.0/89.0
R.L. = -20 dBm	10.5/82.2	2.0/49.3	7.9/81.5	-4.5/55.3

AMPLITUDE

Max. input power (CW)	23 dBm	50 MHz – 9.5/20 GHz and the preamplifier is off
	10 dBm	9 kHz - 50 MHz or preamplifier is on
Max. DC voltage		± 10 VDC
Display range		DANL-23 dBm (typ.)
Amplitude accuracy	9 kHz - 9.5 GHz	± 2.0 dB
	9.5 GHz – 20 GHz	± 3.0 dB
IF in-band flatness		± 2.0 dB
Reference level (R.L.)		-50 dBm-23 dBm (typ.)
RF preamplifiers		Automatically turn on or forcibly turn off
VSWR		<2.0:1
90 MHz to Max.Freq.		

Display average noise level
(DANL) (dBm/Hz)
RBW=1 kHz

Reference level	PXE-90R		PXE-200R	
	-20 dBm	-50 dBm	-20 dBm	-50 dBm
9 kHz – 1 MHz	-143.0	-152.4	-143.6	-152.6
1 MHz - 90 MHz	-152.0	-159.2	-151.8	-160.0

90 MHz - 3.0 GHz	-146.0	-167.5	-149.7	-166.3
3.0 GHz - 9.5 GHz	-153.6	-167.0	-151.4	-157.5
9.5 GHz - 20 GHz	-	-	-156.1	-160.6

STANDARD SPECTRUM ANALYSIS

Detector	PosPeak, NegPeak, Sample, Average, RMS, MaxPower
RBW	1 Hz - 10 MHz
VBW	1 Hz - 10 MHz
Data chart	SASudio4 software provides spectrum, spectrogram, and historical trace
Measurements	Channel power, OBW, X dB bandwidth, Adjacent channel power ratio, IM3

Sweep speed	PXE-90R	PXE-200R
RBW ≥ 1 MHz FPGA spur reject = bypass	about 1.0 THz/s	about 1.1 THz/s
RBW = 250 kHz FPGA spur reject = standard	about 577.5 GHz/s	about 558.8GHz/s
RBW = 50 kHz FPGA spur reject = bypass	about 212.6 GHz/s	about 213.4 GHz/s
RBW = 1 kHz CPU spur reject = bypass	about 2.6 GHz/s	about 2.9 GHz/s

IQ RECORDING

Burst recording bandwidth	Maximum: 100 MHz The built-in memory depth is 128 Mbytes
Continuous recording bandwidth	Maximum: 12.5 MHz Limited by the bandwidth of USB interface and hard disk. The storage depth is limited by the hard disk capacity
IQ sample rate	Maximum: 125 MSPS decimate factor: 1, 2, 4, 8, 32, 64, 128, 256, 512, 1024, 2048, 4096
External trigger response	Maximum response frequency 500 times/s

DETECTION ANALYSIS

Lowest time resolution	8 ns
Max. analysis bandwidth	100 MHz
Detector	PosPeak, NegPeak, Sample, Average, RMS, MaxPower

REAL TIME SPECTRUM ANALYSIS

FFT analysis	FFT engine is implemented in FPGA. Frame compression and trace detection are supported. No missing samples between FFT frames		
	FFT frame update rate= 10^9 ns/(N * D * 8 ns); POI = N * D * 8 ns N for FFT points (2048, 1024, 512, 256, 128, 64, 32) D for decimate factor (1, 2, 4, 8...)		
	Typical settings	FFT refresh rate	POI
	N = 2048, D = 1	61,035 times/s	16.384 us
	N = 32, D = 1	3,906,250 times/s	0.256 us
Max. analysis bandwidth	100 MHz		
Window function	B-Nuttall, Flat-top, LowSideLobe		
RBW	14.73 MHz - 3.59 kHz (Flat-top) 7.81 MHz - 1.90 kHz (B-Nuttall) 13 grades for each window type		
Amplitude resolution	0.75 dB		

Certification

Water and Dust Resistance	IEC 60529 IP68 rating, MIL-STD-810H-512.6 and GJB150.14A-2009 certified
Drop Resistance	MIL-STD-810H-516.8 and GJB150.18A-2009 Certifications
Vibration Resistance	MIL-STD-810H-514.8 and GJB150.16A-2009 certifications

GENERAL

Input and output	
Power	USB PD (65W)
USB port	USB3.0 Type-C*1, USB2.0 Type-C*1, USB2.0 Type-A*1
Audio interface	Micro HDMI * 1 (support for extended display), 3.5 mm headphone port*1
RF input	N(F), Input impedance 50 Ω
External reference clock input	MMCX (F), amplitude ≥ 1.5 Vpp, input impedance is about 330 Ω

Reference clock output	Integrated in MUXIO, 3.3 V CMOS, programmable on/off	
External trigger input	MMXC (F), 3.3 V CMOS, input: high impedance	
Trigger output	MMCX (F), 3.3 V CMOS	
External antenna input	MMCX (F)	
Analog IF Output	MMCX(F), -25 dBm max output power, 50 Ω output impedance Support, 307.2 MHz \pm 50 MHz	
Display	IPS LCD 1280 * 800, 10.1-inch multi-touch screen	
RAM and SSD storage	8 GB/64 GB	
Power consumption	35 - 45 W	
Battery life	about 4 hours, external power bank supply supported	
Size (D * W * H) and weight	about 285 mm * 208 mm * 58 mm and about 2.5 kg	
GNSS synchronization	GNSS (only support external antenna)	\pm 100 ns
Operating temperature (ambient)	T1 class (std.)	-20 - 65 $^{\circ}$ C
Storage temperature (ambient)	T1 class (std.)	-40 - 85 $^{\circ}$ C
Packaging and accessories	Protected main unit*1, power adapter*1, power cord*1	

*Specification applies under the following conditions:

- (1) Start up and warm up for 10 minutes
- (2) Ambient temperature 25 $^{\circ}$ C (core temperature 50 $^{\circ}$ C)
- (3) Standard spectrum analysis mode-spurious rejection standard on.
- (4) Necessary heat dissipation is provided to ensure the ambient and core temperature within the rated range at the same time
- (5) Sweep speed and display average noise level test conditions: MCU:0.55.57,FPGA:0.55.22,API:0.55.61

OPTIONS

Code		
01	Built-in OCXO reference clock	built-in hardware
34	External omnidirectional antenna, 400-8000MHz, Gain<2dBi	accessory
71	Basic digital demodulation	software
72	Pulse detection	software

Distribution in the UK & Ireland



Lambda Photometrics Limited

Lambda House Batford Mill
Harpenden Herts AL5 5BZ
United Kingdom

E: info@lambdaphoto.co.uk

W: www.lambdaphoto.co.uk

T: +44 (0)1582 764334

F: +44 (0)1582 712084

 www.harogic.com

 info@harogic.com