


MAX-Quantum interferometer

USB 3.0 SuperSpeed connection




What makes it unique?

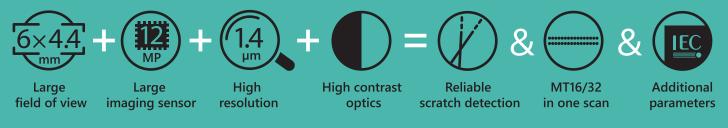


Additional MT ferrule parameters required by IEC

- angles and offset of fiber holes
- angles and parallelism of guide holes

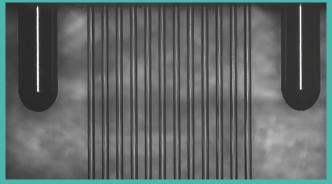


Side view of MT bare ferrule with inserted pins and fibers obtained with True Position™ fixture

angles and parallelism of guide holes

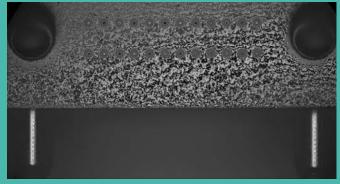


Side+front view of MT ferrule with pins obtained with MAX-SVF-series fixture

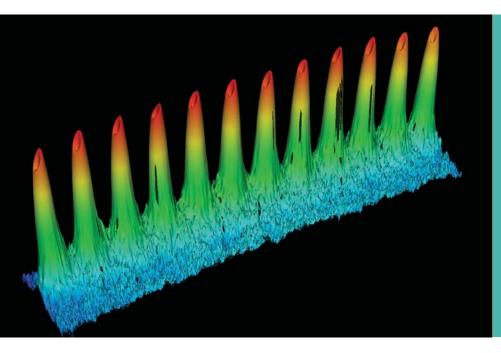

Applications

- Single and Multi-fiber Patchcords
- Mil Spec Termini
- Laser Cleaved Ribbons
- Cleaved Bare Fiber
- Bare Ferrule
- Large Diameter Fiber
- Flat Polish

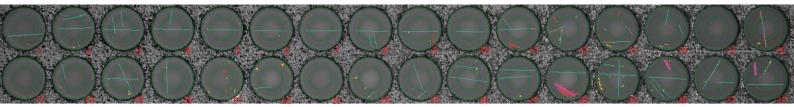

Specification

Repeatability C.F.*:	ROC: 0.9% (MT12); 0.04% (SC/APC) Fiber Height: 0.8 nm (MT12); 0.1 nm (SC/APC) Angles: 0.005 deg (MT12); 0.0002 deg (SC/APC) Apex Offset: 0.04 µm (SC/APC)
Repeatability C.R.**:	ROC: 1.2% (MT12); 0.05% (SC/APC) Fiber Height: 1.1 nm (MT12); 0.4 nm (SC/APC) Angles: 0.01 deg (MT12); 0.006 deg (SC/APC) Apex Offset: 1.0 μm (SC/APC)
	measurements without interaction on connector between measurements (connector fixed) and represent one sigma value. e measurements with removing and inserting connector between measurements (connector reloaded) and represent one sigma value.

Dimensions (H \times W \times L): 181 mm × 213 mm × 117 mm (7.13 in × 8.39 in × 4.61 inches)

Weig	1ht.	
VVEIC	jiit.	

4.8 kg (10.6 lbs)

Power supply:

external, USB 3.0 cable, 12 V DC power adapter

Distribution in the UK & Ireland

Lambda

Lambda Photometrics Limited

Characterisation, Measurement & Analysis

Lambda House Batford Mill Harpenden Herts AL5 5BZ United Kingdom E: info@lambdaphoto.co.uk W: www.lambdaphoto.co.uk T: +44 (0)1582 764334

F: +44 (0)1582 712084