

# Small Instrumentation Modules

*SIM922A and SIM923A — Diode and Pt RTD temperature monitors with analog outputs*

- **Single-channel LED display**
- **1.4 K to 475 K with Si, GaAs or GaAlAs diodes**
- **20 K to 873 K with platinum RTDs**
- **Two analog outputs:  
Linearized  $V \propto T$   
Sensor voltage (buffered)**



## SIM922A and SIM923A Temperature Monitors

The SIM922A Diode Monitor and the SIM923A RTD Monitor continuously read a single sensor and provide both digital and analog outputs. Based on the modular SIM platform, they provide high performance capability in a small footprint.

### SIM922A

The SIM922A has a programmable, precision 10  $\mu$ A current source to provide sensor excitation. Results can be displayed in either kelvins or volts.

### SIM923A

The SIM923A has selectable 10  $\mu$ A and 1 mA current sources to provide sensor excitation. Sensor resistance is determined ratiometrically with a half-bridge circuit consisting of the sensor and an internal reference resistor. The current to the sensor can be reversed by the user to test for any offset. Measurement results can be displayed in either kelvins or ohms.

### Common Features

Both the SIM922A and SIM923A employ four-wire measurement circuits ( $\pm I$  excitation leads,  $\pm V$  sense leads), making readings insensitive to series lead resistance. Sensor excitations can be disabled to reduce power dissipation at sensitive cryogenic stages. Measurements are performed at five readings per second.

The scaled analog output ( $\pm 10$  V) produces a voltage proportional to measured temperature, with a full-scale range from 10 K to 1000 K. A relative-mode button subtracts the last absolute reading prior to scaling to provide expanded resolution for temperature deviations. The second (monitor) output is the buffered, low-noise raw sensor voltage without any additional processing.

Either analog output may be coupled to the SIM960 Analog PID Controller for closed-loop temperature control.

Distribution in the UK & Ireland



**Characterisation,  
Measurement &  
Analysis**


**Lambda Photometrics Limited**  
Lambda House Batford Mill  
Harpenden Herts AL5 5BZ  
United Kingdom

**E: [info@lambdaphoto.co.uk](mailto:info@lambdaphoto.co.uk)**  
**W: [www.lambdaphoto.co.uk](http://www.lambdaphoto.co.uk)**  
**T: +44 (0)1582 764334**  
**F: +44 (0)1582 712084**

## SIM922A and SIM923A Specifications

A factory-standard calibration curve is pre-programmed for each model. Non-volatile memory also permits storage of a 256-point custom calibration curve to convert sensor units (V or  $\Omega$ ) to temperature units (K).

Results are displayed on an easy-to-read, 4-digit LED display. Full remote operation is available over the serial interface.

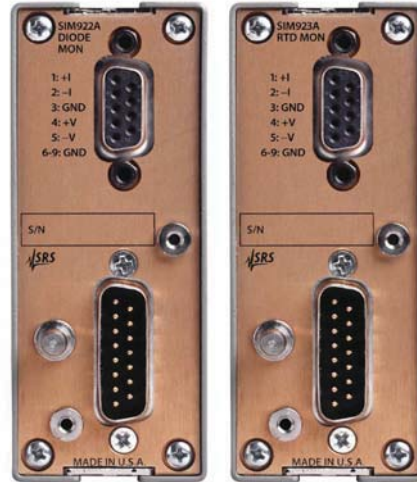

### SIM922A

Number of inputs	1
Sensor type	Si, GaAs or GaAlAs diode
Measurement type	4-wire
Excitation	10 $\mu$ A $\pm$ 0.01 %, $\pm$ 5 ppm/ $^{\circ}$ C
Sensor units	Volts
Input range	0 to 7.5 V
Calibration curves	1 std. plus 1 user-defined curve, 256 points
Temperature range	1.4 K to 475 K (typ.) (Sensor dependent)
Display resolution	4 digits
Interface resolution	1 $\mu$ V
Measurement resolution	4 $\mu$ Vrms
Accuracy, (23 $\pm$ 1) $^{\circ}$ C	20 $\mu$ V + 0.01 % of reading
Temperature coefficient	$\pm$ 5 ppm/ $^{\circ}$ C

### SIM923A

Number of inputs	1
Sensor type	Platinum and other RTDs
Measurement type	4-wire
Excitation	1.0 mA $\pm$ 0.1 %, $\pm$ 5 ppm/ $^{\circ}$ C or 10 $\mu$ A $\pm$ 0.1 %, $\pm$ 5 ppm/ $^{\circ}$ C
Sensor units	Ohms
Input range	0 $\Omega$ to 1400 $\Omega$ (1 mA excitation) 0 $\Omega$ to 140 k $\Omega$ (10 $\mu$ A excitation) (includes excitation lead resistance)
Calibration curves	DIN 43760 plus 1 user-defined curve, 256 points
Temperature range	1.4 K to 873 K (typ.) (Sensor dependent)
Display resolution	4 digits
Interface resolution	1 m $\Omega$ / 100 m $\Omega$ (1 mA / 10 $\mu$ A)
Measurement resolution	1.2 m $\Omega$ rms / 120 m $\Omega$ rms (1 mA / 10 $\mu$ A)
Accuracy, (23 $\pm$ 1) $^{\circ}$ C	5 m $\Omega$ / 0.5 $\Omega$ + 0.01 % (1 mA / 10 $\mu$ A)
Temperature coefficient	$\pm$ 5 ppm/ $^{\circ}$ C

### Common Specifications

Measurement rate	5 readings per second
Scaled analog output	$\pm$ 10 VDC full-scale range
Full scale	10 K, 100 K or 1000 K
Resolution	300 $\mu$ V
Accuracy	1 mV
Monitor analog output	
Offset	<20 $\mu$ V (typ.)
Bandwidth	4 kHz
Operating temperature	0 $^{\circ}$ C to 40 $^{\circ}$ C, non-condensing
Interface	Serial via SIM interface
Connectors	
Sensor	Two DB9/F
SIM	DB15/M SIM interface
Power (max.)	+5 V (250 mA), $\pm$ 15 V (50 mA)
Dimensions, Weight	1.5" $\times$ 3.6" $\times$ 7.0" (WHD), 1.4 lbs.
Warranty	One year parts and labor on defects in materials and workmanship

### Ordering Information

SIM922A	Diode temperature monitor
SIM923A	Pt RTD temperature monitor

Distribution in the UK & Ireland



**Characterisation,  
Measurement &  
Analysis**

**Lambda Photometrics Limited**  
Lambda House Batford Mill  
Harpenden Herts AL5 5BZ  
United Kingdom

**E:** [info@lambdaphoto.co.uk](mailto:info@lambdaphoto.co.uk)  
**W:** [www.lambdaphoto.co.uk](http://www.lambdaphoto.co.uk)  
**T:** +44 (0)1582 764334  
**F:** +44 (0)1582 712084