


# AMP-FL8611-OB-20


- O-band Optical Fiber Amplifier -



## Typical Performance

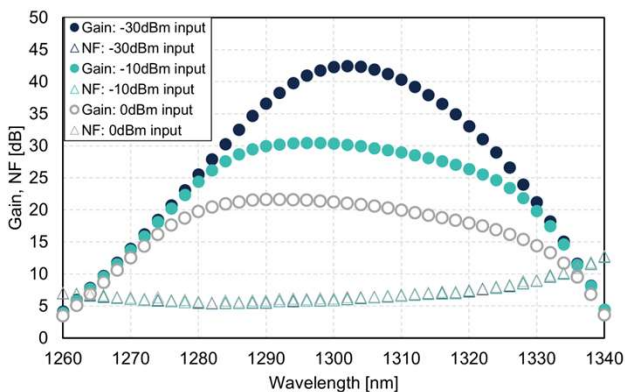

Gain/noise figure vs. wavelength

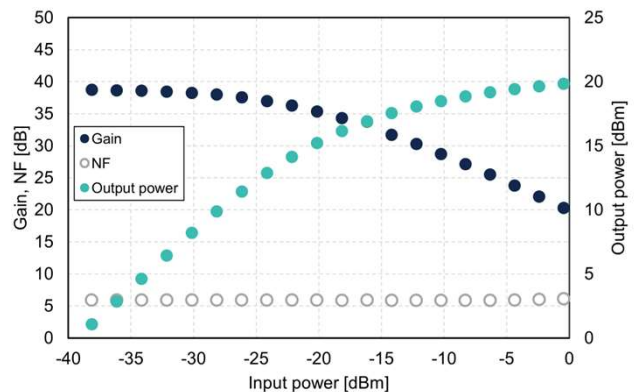

Gain/NF/output power vs. input power @1490nm

## Features

- ❑ This model is based on our proprietary fluoride fiber PDFA technology.
- ❑ High power ( $\geq 20$ dBm)
- ❑ Low noise figure ( $\leq 7$ dB)
- ❑ High stability
- ❑ High reliability

## Applications

- ❑ High speed ethernet (100G, 400G, 800G and beyond)
- ❑ Transceiver testing (e.g., receiver stress test)
- ❑ Optical telecommunications
- ❑ Sensing
- ❑ R&D

## Product Number: AMP-FL8611-OB-20

Optical Specifications	unit	min.	typ.	max.	note
Signal Wavelength	nm	1280	1310	1320	-
Signal Input Power	dBm	-40	-	10	Signal input power monitor
Signal Output Level	dBm	20	-	-	Pin: 0dBm @ $\lambda$ typ.
Signal Gain	dBm	35	39	-	Pin: -30dBm @ $\lambda$ typ.
Noise Figure	dB	-	6	7	Pin: -30dBm @ $\lambda$ typ.
Working Axis	-	-	-	-	-
Polarization Extinction Ratio	dB	-	-	-	-
Input/Output Isolation	dB	40/40	-	-	Internal isolator included
Laser Class	-	1	-	-	-
Standard Optical Connector	-	FC/PC	-	-	-
Input/Output Fiber	-	Corning SMF28e	-	-	-

Functional Specifications		note
Operating Mode	Auto Current Control - Auto Light Control	-
Monitoring Parameters	- Input signal power - Output signal power - Back-reflection from outout port - Pump LD current - Pump LD temperature - Case temperature	- - Opt.093 - - -
Remote Control	- RS-232C - IEEE488.1(GP-IB)	- -
Safety Function	- Key lock switch - Remote interlock - Pump shutdown with input alarm - Power reduction with back reflection alarm	- - - Opt.093

Electric Specifications	unit	min.	typ.	max.	note
Power Consumption	W	-	-	50	-
Insulation Resistance	MOhm	10	-	-	DC500kV, b/w PS-Case
Withstand Voltage	kV	1.5	-	-	AC, 2seconds, b/w PS-Case
Power-Supply Voltage	V	90	-	240	AC
Fluctuation Tolerance	%	-	-	10	-
Power-Supply Frequency	Hz	50	-	60	-
Fluctuation Tolerance	%	-	-	10	-

Mechanical Specifications	unit	min.	typ.	max.	info.
Weight	kg	-	-	10	-
Dimension	mm	- 88 x 430 x 350	-	-	HxWxD, without protrusions, 2U compatible

Environmental Specifications	unit	min.	typ.	max.	info.
Operating Temperature	° C	0	-	40	-
Storage Temperature	° C	-10	-	60	-
Operating Humidity	%rh	0	-	90	Non-condensing
Operating Condition	-	Indoor Use	-	-	-

### Other/Special Specifications

None in particular

Option	
opt.011	N/A
opt.012	FC/Angled-PC
opt.013	SC/PC
opt.014	SC/Angled-PC
opt.072	N/A
opt.091	N/A
opt.093	Back reflection monitor, alarm & Interlock
opt.121	N/A
opt.123	Rackmount brackets (Size: 88(H)×430(W)×350(D) mm)

Standard Accessory	
Power cable	: 1
Power key	: 2
Manuals	: PDF
Specification sheet	: PDF
Inspection record	: Hard copy

※ All functions, specifications and appearance are subject to change without notice.



Distribution in the UK & Ireland



**Characterisation,  
Measurement &  
Analysis**

**Lambda Photometrics Limited**  
Lambda House Batford Mill  
Harpenden Herts AL5 5BZ  
United Kingdom  
E: [info@lambdaphoto.co.uk](mailto:info@lambdaphoto.co.uk)  
W: [www.lambdaphoto.co.uk](http://www.lambdaphoto.co.uk)  
T: +44 (0)1582 764334  
F: +44 (0)1582 712084

